

FORESTUFF

Installation Instructions


- Toyota GR Yaris

(We recommend that the installation be carried out by qualified specialists!)

- 1. Remove engine cover
- 2. Loosen coolant reservoir (SW10) [1]
- 3. Fold coolant reservoir to the side



4. Loosen screw [2] (SW10) on the intake pipe in the engine compartment (Caution: Danger of loss!)

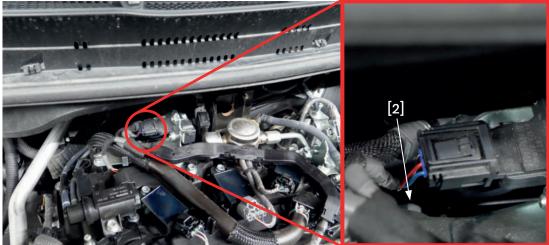

5. Loosen hose clamp (SW10) from intake manifold [3]





Seite 2 von 3

6. Loosen 1x screw and 1x nut [4] (SW12) on turbocharger housing

7. Remove bolt [5] at turbocharger housing (multi-tooth nut E8)


8. Remove original turbo inlet



9. Tighten the Foresight Turbo Inlet with the supplied screws [7] (Allen 6). (Pay attention to enclosed seal [6]!)



10. Slide on Foresight guide hose with enclosed hose clamps
11. Tighten hose clamp [8] (SW7) on guide hose

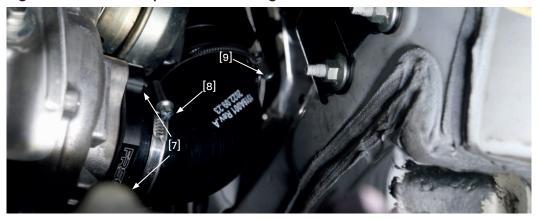



Seite 3 von 3

12. Tighten hose clamp [10] (SW7) on guide hose in engine compartment



13. Tighten screw [2] (SW10) on intake manifold in engine compartment 14. Tighten coolant reservoir (SW10) [11]



If you have problems with the installation or need further information, you can watch our installation tutorial on YouTube.

Just use the following QR Code:

(https://youtu.be/b34JioQMell)



We will be happy to answer any questions about the product or provide assistance with installation if you don't know what to do.

Write us an e-mail to info@foresight-shop.de

and we will help you as soon as possible.